



SEMAPHORE



Semaphore S20 SHDSL Modem

Now convert existing copper wire infrastructure into a high-speed Ethernet network when installing a new SCADA or telemetry system – even if it spans distances previously unattainable by conventional DSL technology.

The Semaphore S20 SHDSL Modem extends communication speed and reach without the additional investment of installing new communications media. An alternative to wireless technology, the S20 SHDSL Modem's unique repeater capability enables communications over existing copper wire networks spanning up to hundreds of kilometers. The modem is ideal for railway, pipeline, utility and power transmission applications that presently employ a copper wire communications network.

Semaphore's S20 SHDSL Modem extends dual Ethernets at high speeds over copper wire pairs to allow for the connection of multiple devices using standard IP protocols. Unlike most products, which inherently limit transmission distance, our S20 SHDSL Modem features a repeater mode which provides excellent reach capabilities.


Configuration of the S20 is extremely simple and uses a web interface to display DSL and Ethernet port status and configure line speeds, network address, and authentication permissions.

Semaphore's S20 uses G.SHDSL (Symmetric High-bit rate Digital Subscriber Loop) technology for sending and receiving high-speed symmetrical data streams over a single pair of copper wires at rates between 192 kbps to 2.31 mbps. Also known as G.991.2, G.SHDSL is an international standard for symmetric DSL developed by the ITU.

G.SHDSL was developed to incorporate the features of other DSL technologies, such as ADSL and SDSL, to transport T1, E1, ISDN, ATM and IP signals. This is the first DSL technology to be developed from the ground up as an international standard.

Semaphore's S20 SHDSL Modem features:

- Two Ethernet connections, with an embedded switch, over a single copper wire pair
- Two G.SHDSL modems in one package
- Up to 2.31 Mbps speed with up to 17 kilometers between nodes
- Repeater function which permits repetition over hundreds of kilometers
- Transparent Ethernet/IP connectivity
- Support of any standard IP communications, e.g. Modbus TCP
- Symmetric communication that also allows voice and video
- Simple configuration via web interface
- DIN rail mounting
- Rugged design for industrial applications
- Operating temperature of -40 to +65°C

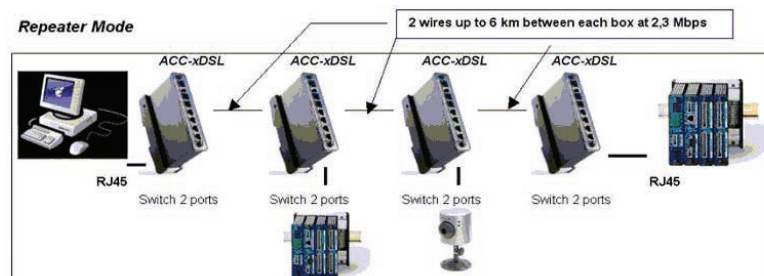

SEMAPHORE S20 SHDSL MODEM SPECIFICATIONS

Product description	Industrial grade S20 modem: converts copper wires into a high-speed IP network
SHDSL ports	2 x lines
Ethernet ports	2 x RJ45 10-100BaseT Ethernet ports
Ethernet cable type	Cross cable or standard (auto crossing support)
IP router	Embedded switch
RS232 Port	Used for setup
Protocol support	All IP protocols
Maximum speed	2.3 Mbps
Maximum SHDSL length	Up to 6 km on a simple phone cable pair Up to 13 km on a 0.9 mm pair cable
Field-tested efficiency	5 km with cable of 0.5 mm @ 2,048 Mbps
Accepted topologies	Point to Point, Multipoint (repeater mode)
Switch	For Stop, Reset and Run
Internal coding	TC-PAM
Power supply input	8 to 30 VDC
Housing	Anodized Aluminum
Mounting	DIN rail mounting
Dimensions	152mm x 85mm x 29mm
Weight	520 grams
I/O protection	Protection of I/O according to IEC-61131 norm
Line protection	Electronic fuses in series: 0.24A Crowbar between lines and between each line and earth (surge protection): 170 V
Operating conditions	-40 to +65°C
Storage conditions	-40 to +70°C
Humidity	0-95% non-condensing
CE approvals	Yes
Product reference	ACC-XDSL

USA

CSE-Semaphore
15B Charron Avenue
Nashua, NH 03063
USA

P +1 (603) 577 3803/3804
F +1 (603) 577 3855

Australia

CSE-Semaphore
Unit 8, 3-5 Gilda Crt
Mulgrave, Victoria 3170
Australia

P+61 (03) 8544 8544
F+61 (03) 8544 8555

Europe

CSE-Semaphore
Chaussée de Bruxelles, 732A
B-1410 Waterloo
Belgium

P +32 (2) 387 42 59
F +32 (2) 387 42 75

© 2008 CSE-Semaphore. All rights reserved. T-BOX, T-VIEW, and Dream Report are trademarks of CSE-Semaphore. All other marks may be trademarks of their respective owners. 0861007 02/08